



2920 siawood x

For optimum performance on solid wood



For optimum performance on solid wood

With its robust cloth backing, 2920 siawood is suitable for highly demanding solid wood applications.

- ▶ Perfect surfaces thanks to TopTec
- ▶ Dust-free process: Antistatic construction minimises dust build-up on belt, workpiece and machinery
- ▶ Suitable for long periods of use thanks to very robust backing and optimised grit spreading technology
- ▶ High removal rate when working on softwood and hardwood with coarser grits


Product profile

Grit type:	Aluminium oxide	
Grit range:	16; 24; 36-220	
Backing:	Y-wt cloth, cotton	P016 – P050
	X-wt cloth, cotton	P060 – P220
Coating:	Closed	
Bonding:	Resin over resin	
Equipment:	TopTec	

Applications

- Flush sanding of edges
- Coarse sanding in plywood manufacturing
- Intermediate sanding in plywood manufacturing
- Coarse sanding of laminated softwood panels
- Intermediate sanding of laminated softwood panels
- Fine sanding of laminated softwood panels
- Sanding of paints and lacquers

Use

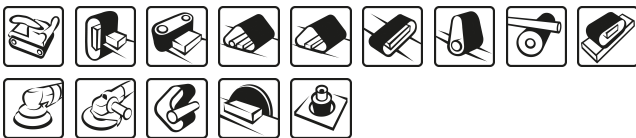

Materials

Soft wood; Hard wood; Resinous wood; Solid surface material; Old lacquer; Old paint; Bodyfiller; Primer filler; Plywood panel; MDF board; Chipboard

Technology

siafast; Stearat; TopTec